



Scanning with Simplicity



SAVEO-RGDPTL-S12D-USB Quick Start Guide

Package contents

1 x SAVEO-RGDPTL-S12D-USB wired scanner
1 x Holding Cradle
1 x Quick Guide

Contact us at:

Email:
inquiry@saveoscan.com

US: +1-720-257-7070

UK: +44-208-099-8071

Web:
www.saveoscan.com

IRE: +353-1-685-4600

Limited Warranty

Saveo Scan provides a 2-year limited warranty on SAVEO-RGDPTL-S12D-USB. This warranty does not cover any product which has been subject to improper use, neglect or unauthorized repair or installation. This warranty does not cover consumable parts. (Cables & batteries are consumables.)

Safety information

- * Don't put scanner in places of excessively high temperature, such as exposure to direct sunlight
- * Don't use scanner in extremely humid conditions or in conditions of extreme temperature change
- * The rechargeable battery is permanently built into the product and cannot be replaced.
- * Never damage the rechargeable battery. Damaging the casing of the rechargeable battery might cause explosion or fire!



Connecting via USB Cable


Getting Started

Please Note: If you use US keyboard, It's plug and play. If you use another type of keyboard, please refer to "keyboard language" section to configure the keyboard language before connecting.



USB HID Keyboard Emulation Mode (Default mode)

Connect the Scanner to your computer with the included USB cable

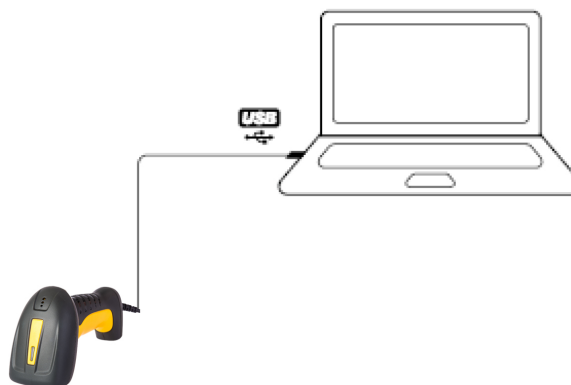

Once connected, the scanner will appear as an external keyboard input device and scanner into an input field where the cursor is focused/auto-focused.

Language Mode

US English (Default)



French



Germany



UK English



Netherlands



Portuguese



Spanish



Swiss DE



Italian



For a complete list of supported countries, go to: saveoscan.com/downloads

Power Saving Mode

Power saving mode is enabled by default and will put the scanner to sleep after 1 minutes inactivity. To wake up the scanner simply press the trigger.

Below are the barcodes to modify power saving times.

Disable Sleep

Never Enter Power Saving Mode



30 Minutes

Enter Power Saving Mode after 30 minutes of inactivity



10 Minutes

Enter Power Saving Mode after 10 minutes of inactivity



3 Minutes Enter Power Saving Mode after 3 minutes of inactivity



30 Seconds

Enter Power Saving Mode after 30 seconds of inactivity



Scanning Mode

Direct Scan Mode (Default)

Data is transmitted instantly to your device, upon a scan.



Memory Scan Mode

Data is stored and transmitted to device upon a request using the command codes below.



Memory Scan Command Codes



USB VCOMM Mode

Connect the scanner in USB Virtual serial communication mode (requires a compatible application or keyboard wedge software).

