


NT-2085L Specifications

Desktop 2D Barcode Scanner

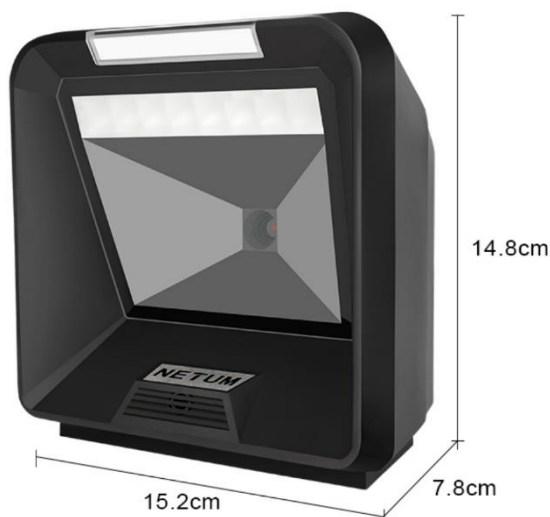

Specifications

- **Image Resolution:** 1280*800
- **Light Source:** 625nm red LED
- **Field of View:** Horizontal 42°; Vertical 31°
- **Barcode Types Supported:**
 - **1D:** UPC-A/UPC-E, EAN13/EAN8, ISBN/ISSN, Code128/GS-128, Code39, Code93, Code32, Code11, Codabar, MSI PLSEYY, ITF25, STD25, Matrix25, IND25, HK25, Pharma code, Telepen, Trioptic code, Brazilian bank code, Postal Code, GS1 Databar, GS1 Composite code
 - **2D:** QR Code/Micro QR, Data Matrix, PDF417/Micro PDF417, Aztec, Maxicode, Hanxin
- **Precision:**
 - 1D: 3mil Code 39
 - 2D: 5mil QR code
- **Print Contrast:** 25%
- **Operating Temperature:** -20°C to +50°C
- **Storage Temperature:** -40°C to +70°C
- **Operating Humidity:** 5% to 95% (non-condensing)
- **Ambient Light:** 0 to 100000 LUX
- **Power Supply:** DC +5V ±5%
- **Power Consumption:**
 - Startup Current: 330mA
 - Standby Current: 190mA
 - Operating Current: 240mA
- **Data Interface:** Ethernet, USB Keyboard/USB COM (optional RS232)
- **Dimensions:** 151mm x 142mm x 84mm